

The RDS-30 depth stretching machine is designed for depthwise stretching of heavy synthetic fiber netting under the steam heat. Traction is attained with heavy-duty brake motors using reduction gears and racks to insure precise stretching, as well as to facilitate instantaneous starting and stopping of both traction and reverse motion. Stretching under steam heating provides the netting with a softer finish and firmly tightened knots required by a finished net that meets the expectations of the international market.


MAJOR FEATURES

- Floor-level chamber to facilitate setting and removal of heavy nets.
- * Remote control system.
- Effective steam leak prevention system.

Model RDS Depth Stretching Machine

		<u> </u>
Туре		30
Stretching capacity	kg	30,000
Speed (1st-step)	m / min.	0.8
(2nd-step)	m / min.	1.6
Hook width	mm	2,400
Operation method		Remote control
Low speed motor	kW	11.0
High speed motor	kW	3.7
Tank cover motor	kW	2.2
Steam requirements volume	kg/H	1,000
pressure	kgf/cm ²	5 ~ 7
Chamber dimensions		At buyer's request.

Boiler not included.

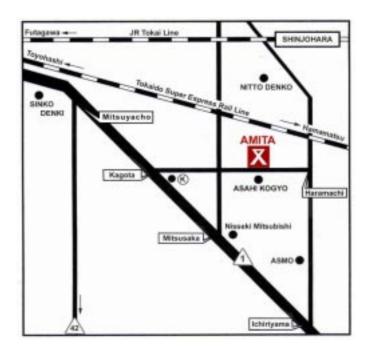







アミタシステムズ



株式会社 アミタ アシーンズ

eMail: sales@gta.amita.co.jp Tel: 81-532-65-2222 Fax: 81-532-65-2220

AMITA TECHNICAL SERVICE

株式会社 アミタテクニカル サービス(ATS.)

eMail: tech@ats.amita.co.jp Tel: 81-532-65-2223 Fax: 81-532-65-2220